

HEAVY DUTY CONCRETE SCREW

For heavy duty fastening bottom plate and timber to concrete slab.

Fast installation of bottom plate onto concrete slab with superior clamping force.

For fixing timber to concrete or brick with a strong performance screw.

Suitable for use with:


- Concrete slab
- Brick
- Block work




For use in Category 5 Corrosive Environments

FIXCONN® CONCRETE Screw	Pack Quantity	Product Code	Torx Driver	Screw Length (mm)	Grip Length (Min)	Shank Diameter (mm)	Threads per Inch
16-10 x 105 B8 Coating	100	SNWSTC8161052T	T40	105	25mm	5.85	10

FIXCONN® CONCRETE Screw	Tensile Load (kN)	Shear Load (kN)	Pull Out Load on Concrete 20MPa (kN) with Embedment of		Pull Out Load on Concrete 30MPa (kN) with Embedment of	
			65mm	87mm	65mm	87mm
16-10 x 105 B8 Coating	29.5	20.1	2.8	4	3.5	5



T40 Torx Drive Positive bit engagement allowing for maximum torque to be applied.

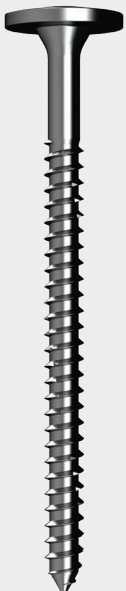

Washer head Broad holding powers means materials are brought together and held in position, resisting warp and head pull through.

Installation recommendation Pre-drill in concrete required (6mm diameter hole).

B8 coating Provides maximum corrosion protection in the harshest environments.

Non expansion for close to concrete edge.

