

Titen Turbo™

You've got to drive it
to believe it!



Titen Turbo
Flat Head Screw



Titen Turbo
Hex-Head Screw

Titen Turbo™ Concrete and Masonry Screw Anchor

Easy, Fast and Reliable.

Smooth driving with less torque while providing superior holding power.

Titen Turbo delivers what pros want — consistently trouble-free installation, and fastening strength they can depend on.

SIMPSON

Strong-Tie

PlaceMakers®

Together we're building
New Zealand

Titen Turbo™

Concrete and Masonry Screw Anchor



Material: Carbon steel


Finish: Zinc plated with baked ceramic coating

Features and Benefits

- Patent-pending Torque Reduction Channel that traps dust where it can't obstruct the thread action, reducing the likelihood of binding in the hole
- Serrated screw point for easier starts when fastening wood
- Availability with either a hex head or, for a smoother installed profile, a 6-lobe-drive countersunk head
- 6-lobe bit included in packaging for flat head version
- Designed for installation with a cordless drill or impact driver
- Use in dry interior environments only

Anatomy of the Titen Turbo™ (TNT) Concrete and Masonry Screw Anchor

Next Generation TNT screw anchor designed to improve installation experience with lower torque and higher loads.

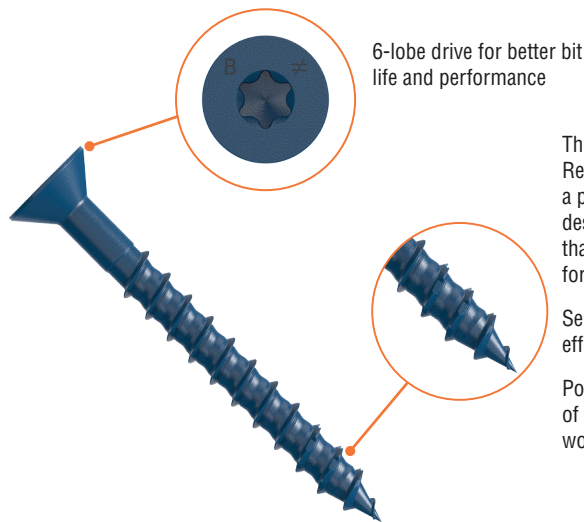

6-lobe drive for better bit life and performance

The revolutionary Torque Reduction Channel features a patented reverse thread design with dust channel that allows more space for dust

Serration on leading edge to effectively cut the concrete

Pointed tip for easy attachment of wood to concrete or for wood-to-wood applications

Specifications

Model No.	Size (mm)	Head Style	Point	Drill Bit Dia.	Quantity	
					Pack	Carton
TNT25114H	6.5 x 32	5/16" Hex	Serrated Screw Point	3/16"	100	1,600
TNT25134H	6.5 x 45					500
TNT25214H	6.5 x 57					500
TNT25234H	6.5 x 70					500
TNT25314H	6.5 x 83					400
TNT25334H	6.5 x 95					400
TNT25400H	6.5 x 102					400
TNT25134TF	6.5 x 45	T30 6-Lobe Flat	Serrated Screw Point	3/16"	100	500
TNT25214TF	6.5 x 57					500
TNT25234TF	6.5 x 70					500
TNT25314TF	6.5 x 83					400
TNT25334TF	6.5 x 95					400
TNT25400TF	6.5 x 102					400
MDB18512C1	3/16" x 140					Percussion Drill Bits to suit above screw anchors



Electrical Boxes



Pipe / Cable Clips




Window Frames / Thresholds



Basement Furring / Framing to Concrete



Shelf mounting to concrete/CMU

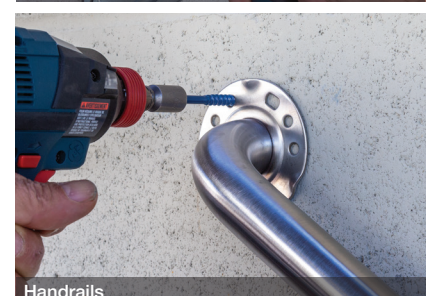

Handrails